

ALUX ROLLER SHUTTER

SAFE 3000

The Safe 3000 is a simple and economic roller shutter for when you want to ensure security without people looking in.

This shutter is used in particular for security solutions in industrial premises and for zone security in shops and warehouses with a high level of security.

The shutter can also be used outside, possibly together with a cover box. This is not, however, the best solutions in terms of security technology.



SAFE 3000 ROLLER SHUTTER

TECHNICAL SPECIFICATIONS

Certification:

CE labelled.

Previous SKAFOR Red Class.

Available according to EN 1627-1630 in RC3 at a maximum width of 4000 mm at additional cost.

Shutter dimensions:

Width, max: 7500 mm

Height, max: 4500 mm

Shutter curtain::

Extruded aluminium profiles.

Guiding rail:

Extruded aluminium profiles with PVC noisereduction inserts as well as teflon wearing pieces at the top.

Dimensions:

F 90 width: 90 x 41 mm and

F 70 width: 70 x 41 mm

Surface treatment:

Aluminium parts with natural anodised surface are standard.

They are also available powder-coated in all standard RAL-colours and in other anodised colours.

Roller tubes, brackets, etc.:

Steel with powder-coated surface (galvanised for outdoor installation).

Operation:

Built-in 230V tubular motor or 230/380V 3 phase industrial motor.

Control:

Key-operated switch or code keypad.

The shutter can also be connected to an alarm system with a special control box.

Locking:

The shutter locks in rolled-down position.

EXTRA ACCESSORIES:

Motor with manual override

Covering box for roller tube

Removable guiding rail

Reinforced bottom profile, standard on wide shutter Manual locking


Unroll safety brake

Control unit with safety edge.

UPS – emergency power supply

DIMENSIONS FORM

Shutter height	Roller diameter
mm	mm
1500	240
2000	250
2500	280
3000	290
3500	300
4000	310
4500	320

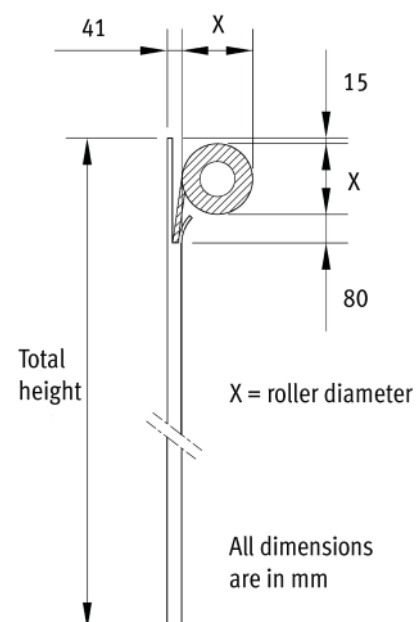

Holmbladsvej 4-6
Dk-8600 Silkeborg

Tel +45 70 26 21 40
Fax +45 70 26 29 94
www.alux.dk