

# ALUX ROLLER SHUTTER

## SAFE 4000 type 40

The Safe 4000 is a compact roller shutter for when you want to ensure security whilst taking up as little space as possible.

This shutter has a completely smooth surface when closed and it has been tested and approved to the highest security level.

The shutter is used in particular for security solutions in canteens, reception areas and for window/doors where there is not much room for a roller.

The shutter is also used for various small cabinets. In addition to this, shutters of this type are used for closed covers on lorries etc. as rollers (for small widths) take up less space than traditional shutters.



# SAFE 4000 ROLLER SHUTTER, type 40

## TECHNICAL SPECIFICATIONS

Certification:  
Skafor, Red Class  
CE labelled

Shutter dimensions:  
Width, max: 7500 mm  
Height, max: 4500 mm

Shutter curtain:  
Extruded double walled aluminium profiles.  
Profile height 40 mm

Guiding rail:  
Extruded aluminium profiles with PVC noisere-  
duction inserts as well as teflon wearing pieces  
at the top.  
Dimensions:  
F 70 width: 70 x 41 mm

Surface treatment:  
Aluminium parts with natural anodised surface  
are standard.  
They are also available powder-coated in all  
standard RAL-colours and in other anodised  
colours.

Roller tubes, brackets, etc.:  
Steel with powder-coated surface (galvanised for  
outdoor installation).

Operation:  
Built-in 230V tubular motor  
or 230/380V 3 phase industrial motor

Control:  
Key-operated switch or code keypad.  
The shutter can also be connected to an alarm  
system with a special control box.


Locking:  
The shutter locks in rolled-down position.

## EXTRA ACCESSORIES

Motor with manual override  
Covering box for roller tube  
Removable guiding rail  
Reinforced bottom profile, standard on wide shutter  
Manual locking  
Unroll safety brake  
Control unit with safety edge.  
UPS – emergency power supply

## DIMENSIONS FORM

Shutter height	Roller diameter
mm	mm
1000	160
1250	180
1500	190
1750	200
2000	220
2500	240
3000	250
3500	270
4000	290
4500	300

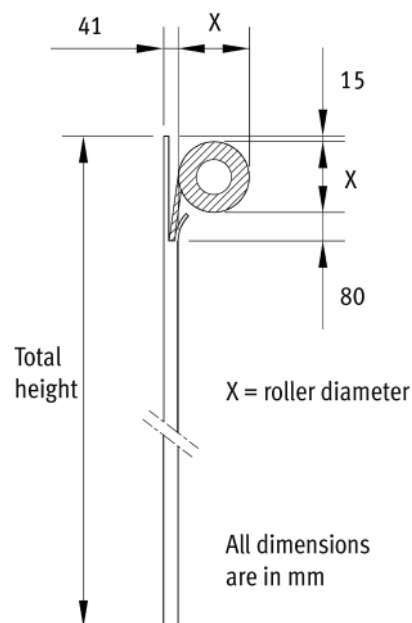

Holmbladsvej 4-6  
Dk-8600 Silkeborg

Tel +45 70 26 21 40  
Fax +45 70 26 29 94  
[www.alux.dk](http://www.alux.dk)