


Product Datasheet

SOFTLINE

Product

Access door **SOFTLINE**
with snap lock for wall and ceiling installation

Item

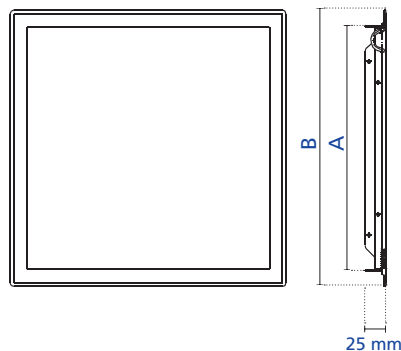

Detail wall anchor

Softline with snap lock - RAL 9016

Item No.	Installation dimension A/ mm	External dimension B/ mm
20472	200 x 200	235 x 235
20476	300 x 300	335 x 335
20478	400 x 400	435 x 435
20482	500 x 500	535 x 535
20484	600 x 600	635 x 635

Softline with snap lock - stainless steel

Item No.	Installation dimension A/ mm	External dimension B/ mm
20485	200 x 200	235 x 235
20486	300 x 300	335 x 335
20487	400 x 400	435 x 435
20488	500 x 500	535 x 535
20489	600 x 600	635 x 635

Application

- For inspecting suspended ceilings made of plasterboard panels
- For inspecting partition and shaft walls made of plasterboard panels

Material

- Designs: galvanised steel sheet, powder coated, white RAL 9016 or stainless steel

Features

- Smooth door panel without visible locking mechanism
- One-piece continuous frame with soft profile for a clean finish on plaster or plasterboard surface
- 4 wall anchors ensure safe installation in the wall or ceiling
- Opening: press the door panel to release the snap locks
- Close: press the door panel again to close the snap locks

Art.-Nr.: 50536_0022



UPMANN GmbH & Co. KG
Weidenweg 20 | 33397 Rietberg

Tel. 05244/ 985-0 | Fax 05244/ 985110
www.upmann.eu | upmann@upmann.eu

UPMANN[®]

Product Datasheet

SOFTLINE

Technical specifications

Material technical data	Classification
Material profile	1.0226 galvanised sheet steel, 0,80 - 1.0 mm/ or stainless steel (V2A 1.4301)
Material door leaf	1.0226 galvanised sheet steel, 0,80 - 1.0 mm/ or stainless steel (V2A 1.4301)
Material wall anchor	1.0226 galvanised sheet steel
Type of seal	snap locks

Mounting

