

DOUBLE BAND

UNIVERSAL DOUBLE-SIDED TAPE

EXCELLENT ADHESION

The solvent-free acrylic glue mix ensures excellent adhesion on most common supports, even at low temperatures.

SECURE

In spite of the low thickness, the sealing will be secure thanks to the reinforcing grid.

COMPOSITION

release liner
silicone coated paper

glue
acrylic dispersion without solvents

reinforcing layer
polyester reinforcing grid

glue
acrylic dispersion without solvents



TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN EN 1942	0,25 mm	10 mil
Adhesiveness	DIN EN 1939	≥ 25 N/25 mm	≥ 5.71 lbf/in
Temperature resistance	-	-30 / +100 °C	-22 / +212 °F
Application temperature	-	-10 / +40 °C recommended > +5 °C	+14 / +104 °F recommended > +41 °F
Watertightness	-	conforming	-
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾Store the product in a dry, covered location.
Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	B [mm]	L [m]	B [in]	L [ft]	
DOUBLE40	40	50	1.6	164	8

■ FIELDS OF APPLICATION



■ RELATED PRODUCTS




SUPRA BAND
page 132



ROLLER
page 326



MARLIN
page 328

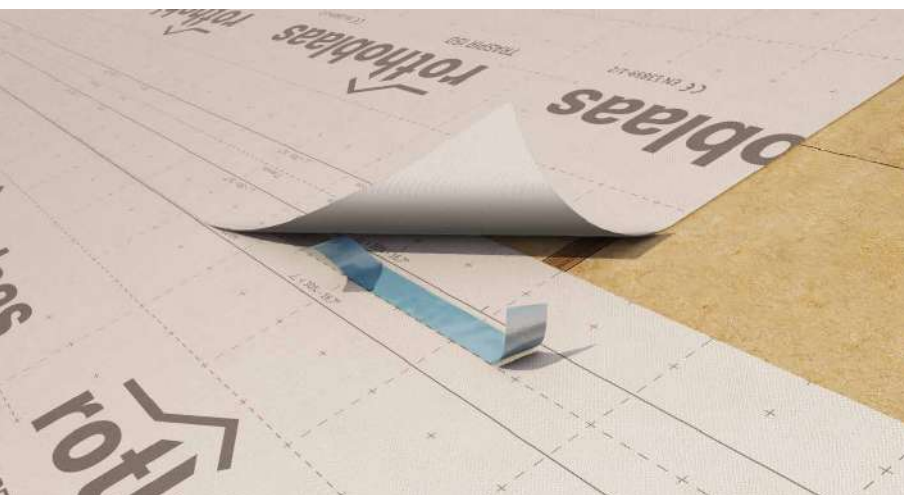

PERFECT INVISIBLE SEALING

DOUBLE BAND provides a perfect concealed seal and offers weather protection and durability.

TEMPERATURE RESISTANCE

Thanks to its special formulation, the acrylic glue ensures excellent stability against temperature ranges.