

SPEEDY BAND



UNIVERSAL SINGLE-SIDED TAPE WITHOUT RELEASE LINER

FAST INSTALLATION

Can be used both externally and internally, guarantees fast and secure sealing on the most common supports.

SUSTAINABLE

The lack of a release film means less waste to dispose of.

COMPOSITION

support
PE film

glue
solvent-free UV-crosslinked acrylic

reinforcing layer
polyester reinforcing grid

glue
solvent-free UV-crosslinked acrylic



TECHNICAL DATA


Properties	standard	value	USC conversion
Total thickness	AFERA 5006	0,245 mm	10 mil
Adhesiveness on steel	AFERA 5001	≥ 25 N/25 mm	≥ 5.71 lbf/in
Adhesiveness on polyethylene	EN 12316-2	≥ 12,5 N/25 mm	≥ 2.86 lbf/in
Tear strength	EN 12317-2	≥ 90 N/50 mm	≥ 10.28 lbf/in
Water vapour transmission (Sd)	EN 1931	40 m	0.09 US perm
UV resistance	-	6 months	-
Watertightness	-	conforming	-
Application temperature	-	-10 / +30 °C	+14 / +86 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +30 °C	+41 / +86 °F
Solvents	-	no	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾Store the product in a dry, covered location.
Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	B	L	B	L	
	[mm]	[m]	[in]	[ft]	
SPEEDY60	60	25	2.37	82.03	10
SPEEDY100	NEW 100	25	3.94	82.03	6
SPEEDY150	NEW 150	25	5.91	82.03	4
SPEEDY300	300	25	11.82	82.03	2

■ FIELDS OF APPLICATION

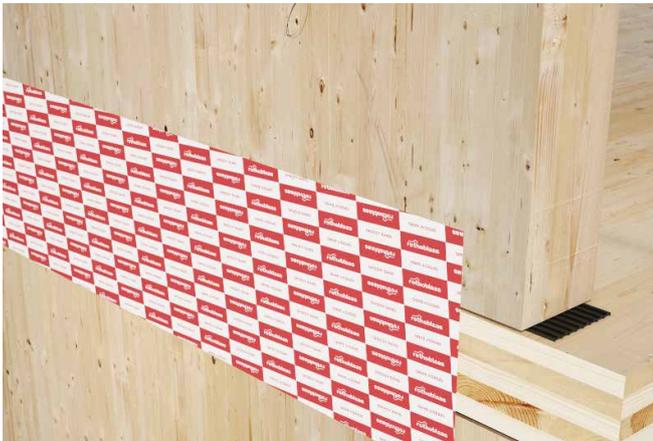

■ RANGE



SPEEDY60



SPEEDY100



SPEEDY150




SPEEDY300

■ RELATED PRODUCTS



SPEEDY ROLL

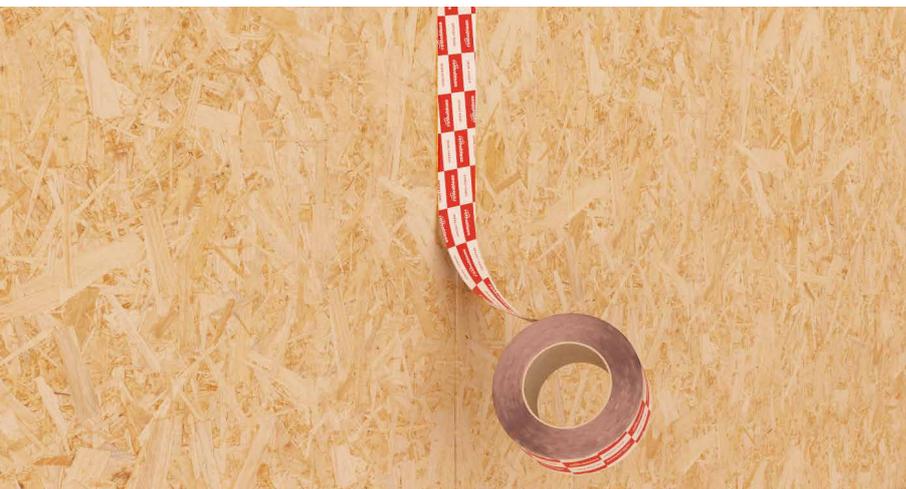

EASY TEAR

It can be easily torn off thanks to the serrated edges that facilitate directional breaking of the tape without the use of scissors or cutters.

UNIVERSAL

Speed and good adhesion strength on most common building materials.