



SUPERB GLUE

HIGH ELASTICITY ADHESIVE GLUE FOR SEALING MEMBRANES

HIGH PERFORMANCE

Adhesion and elasticity stable over time, free of solvents and harmful substances. Storage and use at low temperatures possible.

MAXIMUM ELASTICITY

Formula designed to ensure elasticity and adhesion even after drying.



TECHNICAL DATA

Properties	value	USC conversion
Colour (wet)	light blue	-
Colour (dry)	transparent blue	-
Composition	modified acrylate-polymer dispersion	-
Density EN 542 +20 °C	approx. 1,02 g/cm ³	0.59 oz/in ³
Yield with strip Ø8 mm (cartridge 310 mL)	6,2 m	20.34 ft
Yield with strip Ø8 mm (cartridge 600 mL)	11,9 m	39.04 ft
Film formation time	permanently adhesive	-
Time required for drying 20 °C / 50 %RH	48 hours	-
Temperature resistance once dried	-30 / +80 °C	-22 / +176 °F
Application temperature (cartridge)	+5 / +30 °C	-13 / +86 °F
Application temperature (ambient)	-5 °C	23 °F
Application temperature (support)	+5 / +30 °C	-13 / +86 °F
Solvents	no	-
Ecode (GEV test procedure)	EC1 plus	-
French VOC classification	A+	-
Transport temperature	-30 °C / +40 °C	-22 °F / +104 °F
Storage temperature ⁽¹⁾	+5 °C / +25 °C	+41 °F / +77 °F
Storage time ⁽²⁾	up to 24 months	-

⁽¹⁾Store the product in a dry, covered location.

⁽²⁾Check the expiry date on the cartridge.



Waste classification (2014/955/EU): 08 04 10.

EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction; EUH210 Safety data sheet available on request.

CODES AND DIMENSIONS

CODE	content [mL]	content [US fl oz]	version	
SUPERBGLUE310	310	10.48	rigid cartridge	20
SUPERBGLUE600	600	20.29	soft cartridge	20

GLUE PROPERTIES

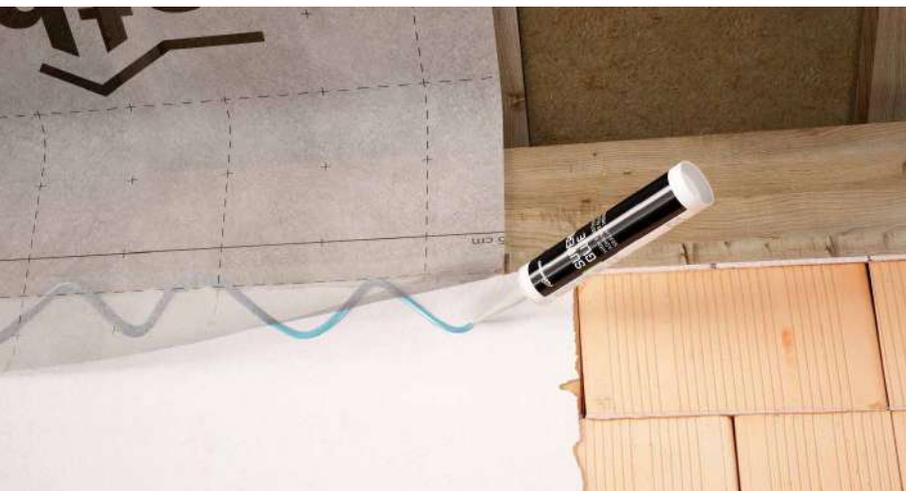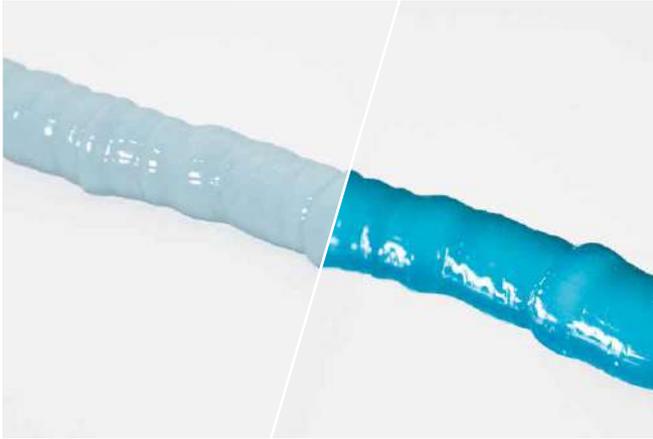

PERMANENT ADHESION | DIN 4108-11

The glue is tested for elastic and durable seals using DIN tests.

EMICODE EC1 PLUS

Thanks to the special formulation, it achieves the highest level of safety with regard to emissions that are harmful to health.