
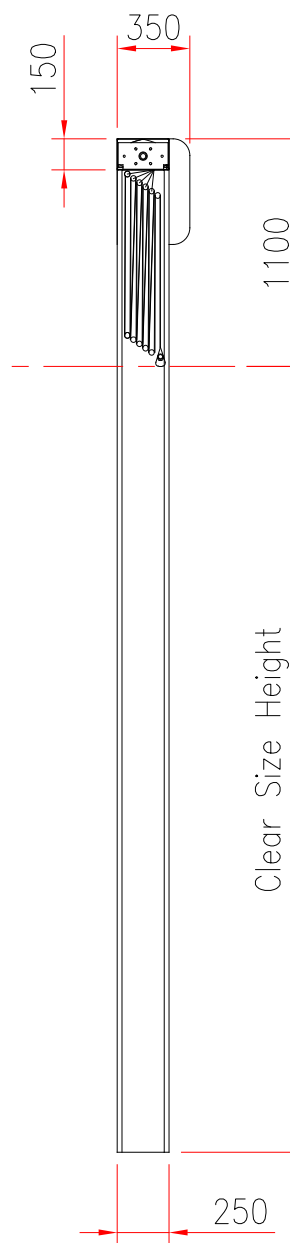


SECTION B-B

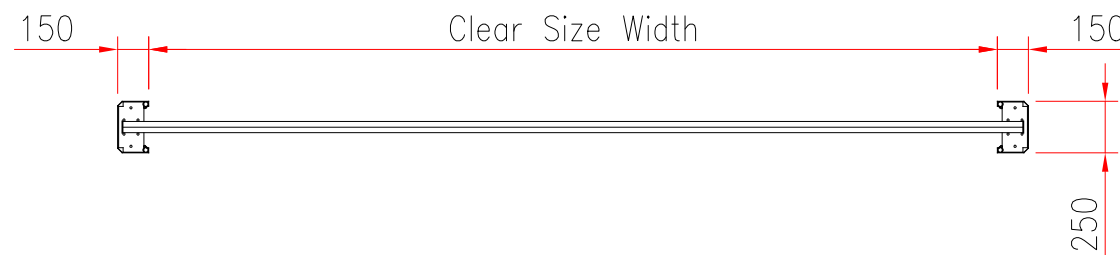


Install power supply lines that meet the correct sizing criteria and take into account the maximum power consumption: 16A for single-phase electronic control panels and 10A for the three-phase. The cross-section of the used pipes is chosen based on the length of the pipe and the condition of the pipe installation, to prevent voltage drop and subsequently abnormal operation of the equipment. Minimum thickness of the wires is 2.5 mm<sup>2</sup>

Supply voltage	400V Three-phase
Power consumption supply pipe	10A
Group	Separate group per door
Engine capacity	0.75-1.5 Kw

Built-in sizes		
Clear size width	Clear size height	Supply

Clear Size Width < 5001 mm  
Clear Size Height < 5001 mm

Powerdoor 650 Fold					
Customer	:	Quotation No.	:		
Project	:	Order No.	:		
Architect	:	Date of issue	:		
Your Ref. No	:				
Scale	Tolerance:	Doc. No. :	Rev.: 06-02-2018	No.: 650.000 LR-150	